

॥ ओउम् ॥



GEETA DEVI DAV PUBLIC SCHOOL

BHANDARKOLA, SATAR ROAD, DEOGHAR - 814114 (JHARKHAND)

Managed by : DAV College Trust & Management Society, New Delhi - 55

Affiliation No. 3430162

School No. 66358

E-mail : gddavpublicschooldeoghar@gmail.com Website : www.gddavdeoghar.org

Tel No. 9431384841, 9229295878, 9431384840

A Senior Secondary English Medium Co-educational School Affiliated to CBSE, New Delhi

Ref. No. DAV/DGR/2025-26/478

Date 01/11/2025

'Tender Notice'

We hereby invite a Tender for Construction of Stair up to G+3 additional with Lobby and Store Room at the School Campus.

Note:

Work to be finishes as per the drawing and estimate attached herewith.

Interested party may finish the quoted rate with GST and other charges (if any) in a sealed envelope latest by 08/11/2025 through By Hand/Registered /Speed Post/E-Mail by 5:00pm.

Sd/-

Principal

Note:- The school may be cancel this tender notice at any time without assigning any reason. if it deems necessary.

BILL OF QUANTITIES

Name of Work:-

Construction of Stair up to G+3 at Geeta Devi DAV Public School,
Bhandarkola, Satar Road, District - Deoghar-814114, Jharkhand(India) .

Statement of Area :-

1. At Ground Floor = 410 sqft = 38.10 sqm
2. At G+1 Floor = 410 sqft = 38.10 sqm
3. At G+2 Floor = 410 sqft = 38.10 sqm
4. At G+3 Floor = 410 sqft = 38.10 sqm



Sl. No	Particulars of Items	Qty	Unit	Rate	Amount
1	Dismantiling of floor,site clerance and all complete job as per direction of E/I.	38.1	sqm		
2	Earth work in excavation in foundation tranches in ordinary soil (Vide classification of soil item-A) and disposal of excavated earth as obtained to a distance up to 50m including all lifts,leveling,ramming the foundation tranches,removing roots of trees,shrubs all the complete as per approved design, building specification & direction of E/I.	121.5	cum		
3	Providing PCC M-75 with nominal mix of 1:4:8 in foundation with approved quality of stone metal grade-III (50mm-25mm) size clean coarse sand of F.M 25-3 including screening, shuttering, mixing cement concreete in mixcture and placing in position all complete as per building specification and dirction of E/I.	15.35	cum		

4	Providing designation 75B brick work in C.M(1:6)in foundation and plinth with approved quality of clean coarse sand of F.M 2-2.5 including providing 10mm thick mortar, joints cost of screening materials raking out joints to 15mm depth,curring,taxes & royalty all complete as per building specification & direction of E/I.	32.5	cum		
5	Providing designation 75B brick work in superstructure with approved quality of clean coarse sand of F.M 2 to 2.5 including providing 10mm thick mortar, joints cost of screening materials raking out joints to 15mm depth, curring,taxes,royalty all complete as per building specification & direction of E/I.	125.04	cum		
6	Providing coarse clean sand in filling in plinth under floors including watering,ramming in layers not exceeding 150mm thik with all leads and lift including cost of all material, labour, royalty, taxes including all complete as per building specification & direction of E/I.	18.34	cum		
7	Providing designation 75A one brick flat soling joints filled with local sand including cost of watering taxes royalty all complete as building specification and direction of E/I	80	sqm		


8	Providing RCC M-200 with nominal mix of (1:1.5:3) in lintel with approved quality of stone chips 20mm-6mm size graded and clean coarse sand of F.M 2.5-3 including screening, centering, shutring, mixing cement concrete in mixcture and placing in position, vibrating striking, curing and also including supply of all materials, labour, tools and plants etc but excluding the cost of rainforcement taxes and royalty all complete as per specification & direction of E/I.	40.4	cum		
9	Providing RCC M-200 with nominal mix of (1:1.5:3) in column with approved quality of stone chips 20mm-6mm size graded and clean coarse sand of F.M 2.5-3 including screening, centering, shutring, mixing cement concrete in mixcture and placing in position, vibrating striking, curing and also including supply of all materials, labour, tools and plants etc but excluding the cost of rainforcement taxes and royalty all complete as per building specification and direction of E/I.	24.47	cum		
10	Providing RCC M-200 with nominal mix of (1:1.5:3) in roof slab with approved quality of stone chips 20mm-6mm size graded and clean coarse sand of F.M 2.5-3 including screening, centering, shutring, mixing cement concrete in mixcture and placing in position, vibrating striking, curing and also including supply of all materials, labour, tools and plants etc but excluding the cost of rainforcement taxes and royalty all complete as per building specification and direction of E/I.	80	cum		

11	Providing tor steel reinforcement of (8,10,12,16,20)mm dia rods as per approved design and drawing excluding carriage of M.S bars to work site, cutting, bending & binding with annealed wire with cost of wire, removal of rust placing the rods in position all complete as per specification & direction of E/I.	10.45	mt		
12	providing 12mm cement plaster(1:4) in brick wall with clean coarse and of F.M with floating coat of neat cement in skirting including rounding of junction,curing,taxes and royalty all complete as per specification & direction of E/I.	1200	sqm		
13	providing 6mm cement plaster(1:3) in ceiling with clean coarse and of F.M with floating coat of neat cement in skirting including rounding of junction,curing, taxes and royalty all complete as per specification & direction of E/I.	220	sqm		
14	Providing and fixing grill/ collapsul gate/Hand rail as per approved design and drawing as per building specification & direction of E/I.	1700	kg		
15	Providing and laying vitrified Floor/Parking/Industrial tiles in different size(Thickness to be specified by the manufacturer and conforming to IS:4457:2007 in all colours. As per direction of E/I.	120.92	sqm		
16	Disposal of moorum/Bulding rubbish /Malba dismalted or waste material by mechanical transport including loading unloading transporting to approved municipal dumping yard up to 10km for all lifts, complete as per direction of E/I.	450	sqm		


17	Applying exterior/Interior grade acrylic primer(Two Coat) of approved quality and brand on plastered or cencered surface old or new surface to decorative texture(matt finish) of smooth exterior emulsion paint(One coat) including scraping and preparing the surface throughly, complete as per direction of E/I.	1500	sqm		
18	Plumbing/Electrical fitting and insullation including cost of material, Labour and all complete job. (5% of estimated cost)				
Sub Total					
GST 18%					
Total Cost					
Total Cost In Words					
Submitted By: Contractor's Representative: Contractor's Seal:		SIGNATURE			

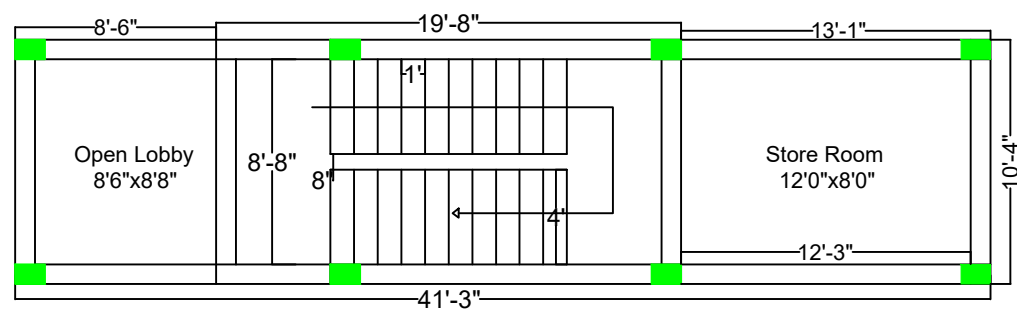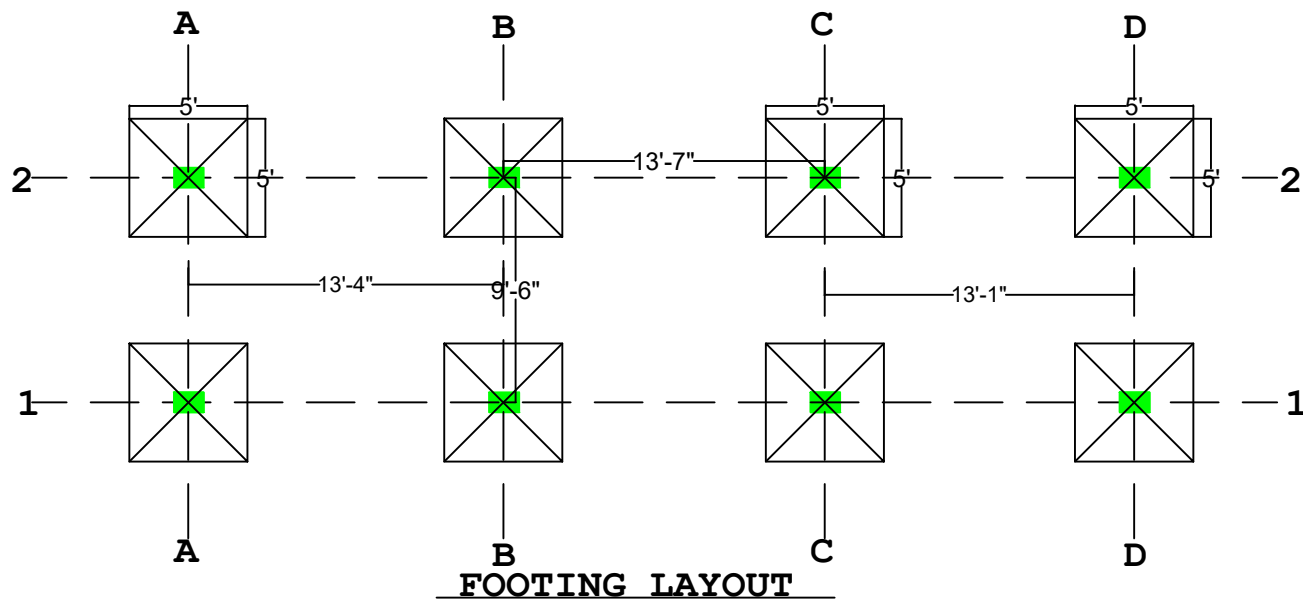

COLUMN PLAN

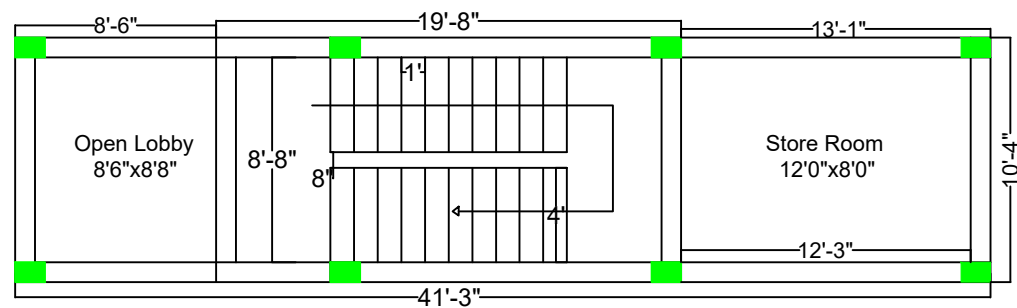

STAIRCASE PLAN

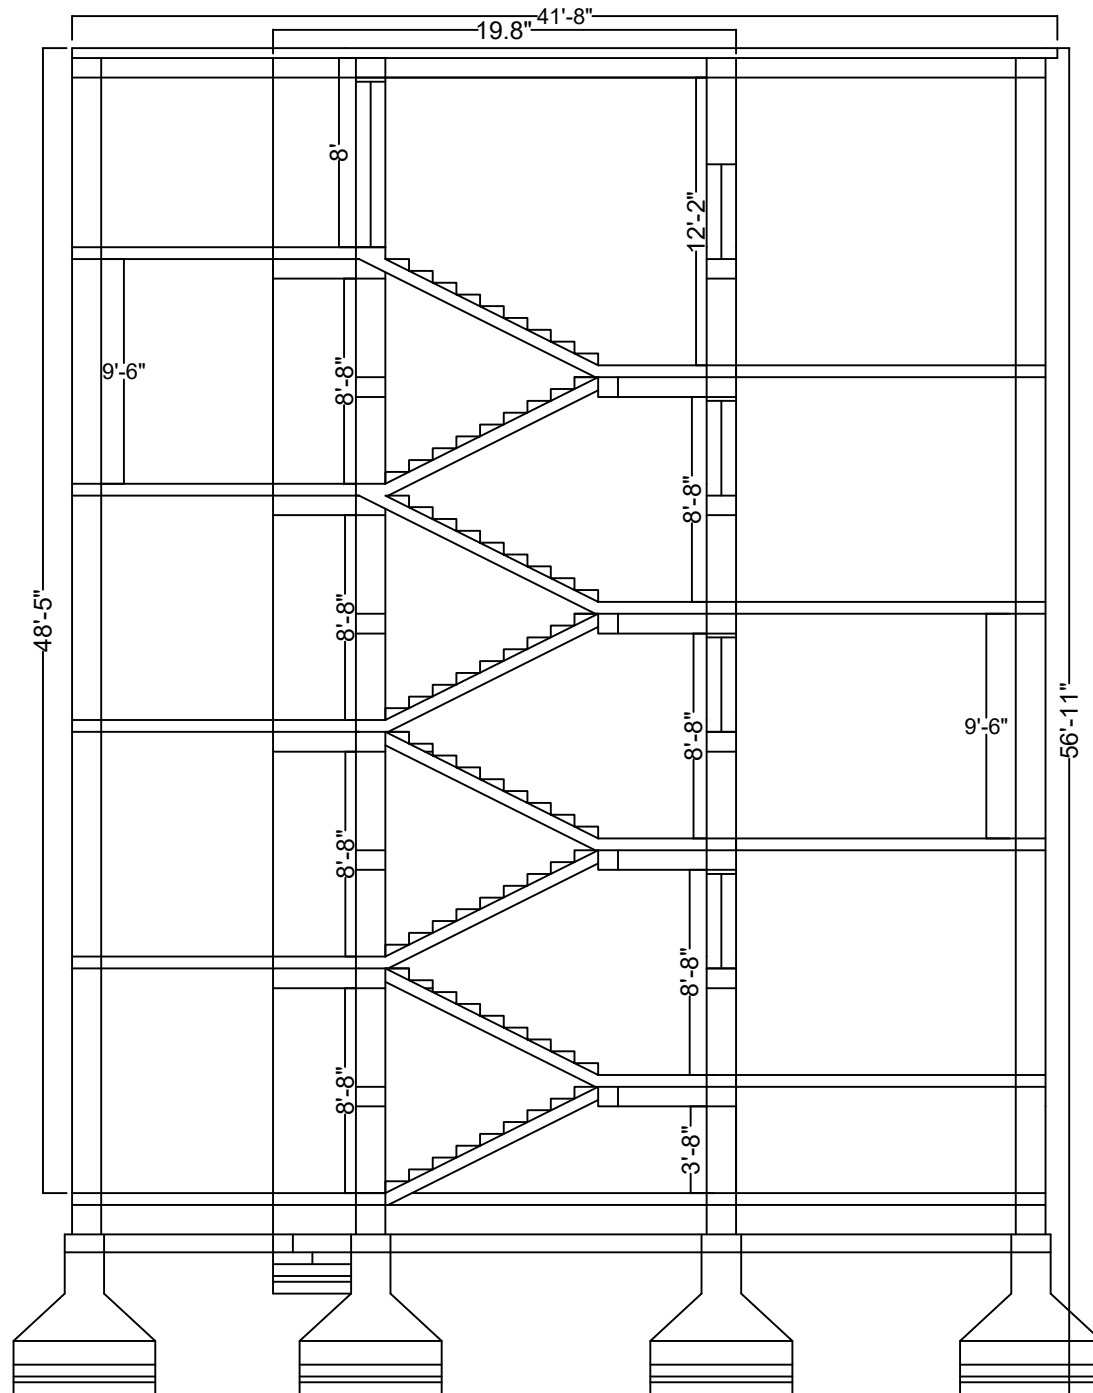

SECTION PLAN

Project: Proposed Stair plan up to G+3			
Client: Geeta Devi DAV Public School, Bhandarkola Satar Road, Mouza-Bhandarkola, Thana-Deoghar, District-Deoghar-814114 (Jharkhand).			
Project Code: KD25/302/DEOGHAR			
Written Dimension on these documents shall take precedence over all scaled dimensions, contractors are to be verify & be responsible for all dimension setbacks and conditions at the job site.Architects / Designer shall be notified of any variations in dimension, setbacks and or condition before said construction is authorized. All dimension are in feet unless mentioned otherwise.			
General Note: 1.All Dimension in Feet. 2.Use M20 concrete. 3.Use of vibration is mandatory. 4.Clear cover to Beam 25mm & for slab 15mm. 5.Compression overlap 45D & tension overlap 60D. 6.Clear Cover main reinforcement & column should be 40mm. 7.Not more then half the column steel lapped at level. 8.The depth of excavation level & hard soil having SBC 250 KN/SQM or as depth to 1.20m to 1.5m 9.Use steel props & steel support along with testified coat plywood shuttering & foam work. 10.Center line dimension to be verified by the Engineer before lay outing of the column/Slab.			
Details:			
Gate (G)	9'0" X 7'0"	GRL	9'6"
Door (D)	3'6" X 7'0"	GRFL	10'0"
Door (D1)	3'0" X 7'0"	G1RL	9'5"
WINDOW (W)	5'0" X 4'0"	G1RFL	10'0"
WINDOW (W1)	1'6" X 2'0"	Trad	250mm
PL	1'6"	Riser	150mm
Set Back Details			
North	0'0"	South	0'0"
East	4'6"	west	4'6"
Direction			
Architects			
 KRISHNAN DESIGN			
Bidhu Bhusan Sarkar Road, Barmasia Deoghar-814112, Jharkhand (India)			
AUTHORIZED SIGN & SEAL			
The Drawing and written material herein constitute original work of KRISHNAN DESIGN as intellectual property & instruments of service are subject to copy write and may not be reproduced,distributed published or used in any way without the express written consent of the KRISHNAN DESIGN PVT LTD.			
Date	:	17.04.2025	
Scale	:	NTS	
Plot Area	:	500 sqft	
Buildup Area	:	410 sqft	
Carpet Area	:	350 sqft	
Drawing No	:	KD25/F327/DEOGHAR	
Drawn By	:	Er.N.Kumar	
Checked By	:	Er.P.Kumar	
Approved By	:	Er.O.Krishna	
Sheet Title	:	Stair Plan	
Sheet No	:	01	